

MMVK 3.5 8.10 SKM8X30 V4A (540 271)


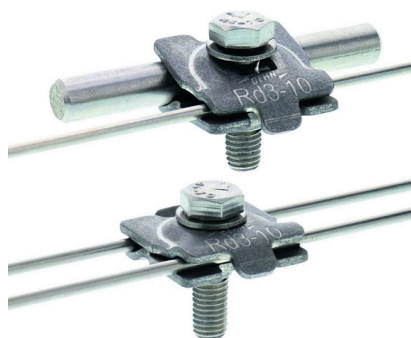


Figure without obligation

Type	MMVK 3.5 8.10 SKM8X30 V4A
Part No.	540 271 ✓
Material	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Clamping range Rd / Rd	8-10 / 3-5 mm
Clamping range Rd / Rd	3-5 / 3-5 mm
Screw	● M8 x 30 mm
Material (screw)	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
Material (washer)	StSt (V4A)
ASTM / AISI:	1.4571 / 1.4404 / 1.4401
Lightning impulse current carrying capability (10/350 µs)	25 kA
Standard	based on EN 62561-1
Weight	50 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364385306
PU	50 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.